



OSSEODOC
User friendly control unit with sterilisable micromotor

OSSEODOC - the new control unit from Bien-Air

Compact, robust and stable, the new **OSSEODOC** control for orthopaedic microsurgery is practical and efficient. Its motor, with a coupling which meets ISO 3964 (the most widely used standard in the world), enables the operator to use a wide range of hand tools, micro-saws and other surgical instruments. Push-button selection of 4 motor speed ranges, two directions of rotation, two irrigation options and 4 flow rates for the peristaltic pump. Most of these functions are available using the foot control. Indicator lights and audible signals indicate the functions activated.

Features that make a difference:

- Convenient multifunctional footpedal with standardized symbols.
- Footpedal for variable speed control and 2-pushbuttons: On the right, selection of the 4 speed ranges and direction of rotation; on the left, peristaltic pump flow rate and ON/OFF control.
- The brushless BASCH motor can be autoclaved with its cable. It operates smoothly without vibration in both directions of rotation through a speed range from 500 to 40,000 rpm. Cooled by self-ventilation.
- An audible signal warns when the motor is rotating counterclockwise.
- Motor monitoring indicator.
- Irrigation flow rate adjustable in 4 steps from 15 to 130 ml/min.
- Irrigation functions: On request, using the pedal «Kick-down» or continuous flow synchronised with motor.
- **OSSEODOC** control unit available with or without peristaltic pump.
- Peristaltic pump kit available separately. Easy for the user to assemble.
- The control unit, motor and cable meet the 93/42 EEC directive and IEC 60601-1 standard.




Multifunction pedal



With or without integral peristaltic pump



Sterilisable BASCH motor

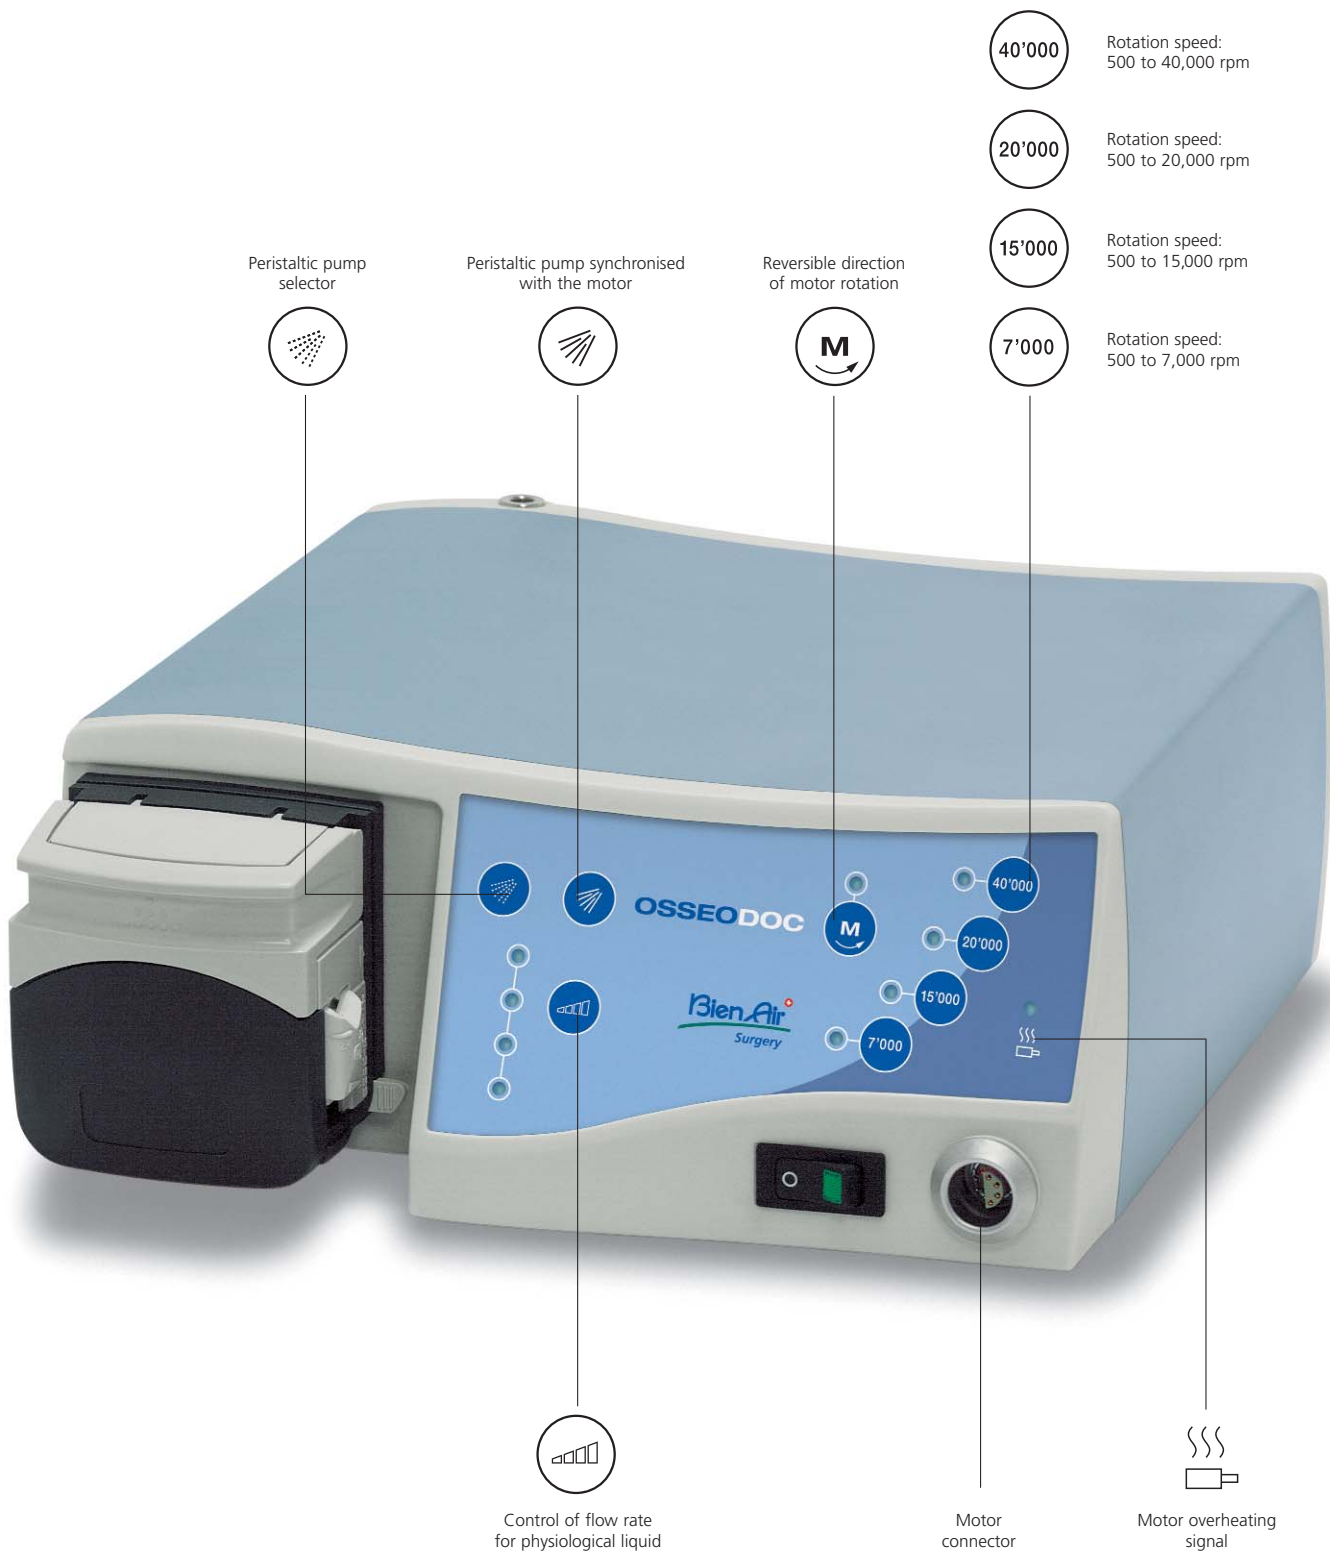

Technical characteristics of the OSSEODOC product range



OSSEODOC

Marking	CE 0120 as per 93/42 EEC directive
Supply voltage	115 / 230 Vac / 50/60 Hz
Motor power supply	1 quick connector of the push-pull type / 24 Vdc
Electrical insulation class	Class I
Applied parts	Type B
Medical class	Ila
Protection class	IP 40
Size / Weight	(L x H x D) 261 x 110 x 300 mm (height with irrigation stand 520 mm) / 5 kg with peristaltic pump, 4.1 kg without pump

Additional equipment for version with integrated peristaltic pump

Irrigation stand	Stainless steel, height 450 mm
Peristaltic pump	Delivery of 15 to 130 ml/min., adjustable in 25% steps (with two-speed Bien-Air irrigation line REF 1100037-001)
Retaining clips	Set of 10 clips for irrigation lines



Multifunction pedal

Protection class	IPx8
Functions	Start/stop, motor forward/reverse selection, speed control selection and operation of peristaltic pump.
Size / Weight	(L x H x D) 160 x 55 x 170 mm / 0.830 kg
Cable	295 cm ±5 cm



BASCH Micromotor with cable

Type	Brushless direct current,
Torque (maximum)	4 Ncm
Mechanical power rating	62 W with OSSEODOC at 20,000 rpm and 24 Vdc
Speed of rotation	500 to 40,000 rpm with OSSEODOC , 4 speed ranges. Self-ventilated
Coupling	As per ISO 3964, the most widely used standard in the world
Size / Weight	Diameter 21 mm, length 100 mm, ISO nose included / 120 g without cable
Motor cable	Push-pull type at OSSEODOC end, stainless-steel nut, black coloured, length 295 cm ±5 cm
Sterilisation of motor & cable	In autoclave at 134°C for 18 min.



OSSEODOC with integrated peristaltic pump

Set comprises:

- 1 **OSSEODOC** control unit
- 1 mains power cable
- With integrated peristaltic pump

With:

- 1 sterilisable BASCH micromotor
- 1 black cable for micromotor
- 1 sealed footpedal with 2 push-buttons, multifunctional
- 1 irrigation stand
- 1 set of 10 irrigation lines with 2 flow rates
- 1 set of 10 retaining clips
- 1 sterilisable handpiece holder

230 Vac set REF 1700168-001

115 Vac set REF 1700242-001

OSSEODOC without peristaltic pump



Set comprises:

- 1 **OSSEODOC** control unit
- 1 mains power cable

With:

- 1 sterilisable BASCH micromotor
- 1 black cable for micromotor
- 1 sealed footpedal with 2 push-buttons, multifunctional
- 1 sterilisable handpiece holder

230 Vac set REF 1700169-001

Peristaltic pump kit



To be integrated into **OSSEODOC** with:

- 1 irrigation stand
- 1 set of 10 irrigation lines with 2 flow rates
- 1 set of 10 retaining clips

REF 1700170-001

Bien-Air Surgery SA
Rue de l'Ouest 2b
CH-2340 Le Noirmont
Switzerland
Tél. +41(0)32 344 64 40
Fax +41(0)32 344 64 45
surgery@bienair.com

Bien-Air
Deutschland GmbH
Surgery
Jechtinger Strasse 11
79111 Freiburg, Deutschland
Tel. +49 (0)761 45 57 40
Fax +49 (0)761 47 47 28
ba-d@bienair.com

Bien-Air España SA
Surgery
Entença, 169 Bajos
08029 Barcelona, España
Tel. (+34) 934 25 30 40
Fax (+34) 934 23 98 60
ba-e@bienair.com

Bien-Air USA, Inc.
Medical Technologies
5 Corporate Park
Suite 160
Irvine, CA 92606, USA
Phone 1-800-433-BIEN
Phone 949-477-6050
Fax 949-477-6051
ba-usa@bienair.com

Bien-Air France Sarl
Surgery
131, Boulevard Péreire
75017 Paris, France
Tel. +33 (0)1 47 64 13 49
Fax +33 (0)1 40 54 91 43
ba-f@bienair.com

Bien-Air on Internet:
www.bienairsurgery.com

Bien-Air Italia s.r.l.
Surgery
Via Vaina 3
20122 Milano, Italia
Tel. +39 (02) 58 32 12 51/52/54
Fax +39 (02) 58 32 12 53
ba-i@bienair.com

Bien-Air UK Limited
Surgery
63, The Street
Capel, Surrey RH5 5JZ, England
Tel. +44 (0)1306 711 303
+44 (0)1306 712 505
Fax +44 (0)1306 711 444
ba-uk@bienair.com

Bien-Air Asia Ltd.
Surgery
Nishi-Ikebukuro
Daiichi-Seimei Bldg. 10F
2-40-12 Ikebukuro, Toshimaku
Tokyo, 171-0014, Japan
ビエン・エア・アジア株式会社
〒171-0014
東京都豊島区池袋2-40-12
西池袋第一生命ビルディング10F
Tel. +81 (3) 5954-7661
Fax +81 (3) 5954-7660
ba-asia@bienair.com

Beijing Bien-Air
Medical Instrument
Technology Service Co. Ltd.
Room 2106, The Exchange Beijing,
No 118 Jian Guo Lu Yi,
Chao Yang District,
Beijing 100022, China
北京彼岸医疗器械
技术服务有限公司
北京市朝阳区建国路
乙118号招商局中心
京汇大厦2106室
Tel. +86 10 6567 0651
Fax +86 10 6567 8047
ba-beijing@bienair.com

